



ONE DAY APPLICATION

LOW VOC

IMPROVED SURFACE COVERAGE* DURABLE SEALER & PRIMER SYSTEM



Plan your project

▲ Driveways ▲ Garage Floors ▲ Paths ▲ Patios ▲ Steps ▲ Commercial ▲ Retail

SEALED CONCRETE Step 1
Test your surface

Step 2
Prep & Clean

Step 3
Apply Primer

Step 4
Apply Sealer
(Add Slip Additive

BARE CONCRETE Step 1
Prep, Clean
& Etch

Step 2
Apply Primer

Step 3
Apply Sealer
(Add Slip Additive

Take the surface test

If your surface was previously sealed, take the surface test.

- **1.** Place a 10cm² piece of cotton cloth on sealed concrete surface.
- **2.** Pour xylene on cloth to saturate surface.
- **3.** Cover with a sheet of cling film.
- 4. Wait for 30 minutes.
- **5.** Remove cloth and observe surface.

If there is no reaction, the coating is likely an epoxy or urethane.

We recommend you seek professional help. Recoating epoxy or urethane coated surfaces needs specialist preparation.



If coating dissolves, or can be wiped away, or softens and becomes sticky, then coating is acrylic.

Apply Dulux Avista Sealed Surface Primer. Then apply Dulux Avista Waterbased Tintable Concrete Sealer.



If the coating wrinkles, the coating is most likely an alkyd.

We recommend contacting your Dulux Avista Representative for guidance.



Application

How to apply



Clean surface with a commercial grade, general purpose cleaner. Any oil stains should be treated & cleaned with an industrial degreaser.



Apply Dulux Avista Sealed Surface Primer OR Bare Concrete Primer per application instructions.



Pressure clean surface at minimum 2000 psi and allow to dry.

There should be no pooled or standing water on the surface.



Apply Dulux Avista Waterbased Tintable Base Concrete Sealer per application instructions, allowing it to dry in between coats.



Acid etch using Dulux Avista Hydrochloric Acid. Pressure clean the surface before acid dries. Allow surface to dry.






Tape up any areas that require protecting.



Watch how the professionals do it

^{*} Step 3 only required for Bare Concrete Surfaces



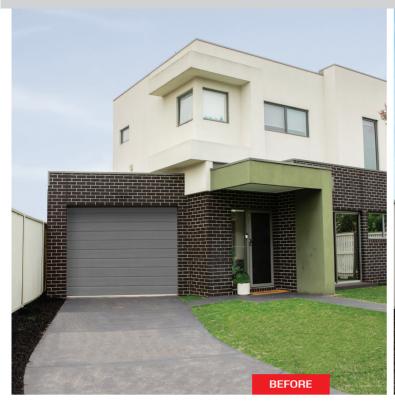



Prime

Use of primer improves adhesion of sealer to the concrete surface

BARE CONCRETE

Dulux Avista Bare Concrete Primer



Seal

- Increases adhesion of Dulux Avista Waterbased Tintable Sealer on bare concrete
- Penetrates and stabilises the concrete surface
- 2 coat application
- 10–12m²/L coverage

SEALED CONCRETE

Dulux Avista Sealed Surface Primer



- Designed to create strong bond to previous acrylic coating with Dulux Avista Waterbased Tintable Sealer
- 1 coat application
- 10-12m2/L coverage



Rejuvenate and protect the surface

Dulux Avista Waterbased Tintable Base Sealer



- UV and fade resistant
- Non-yellowing
- Resists stains, dirt and hot tyre pick up (when surface has been prepared properly)
- Good marking resistance
- · 2 coat application
- 4-8m²/L coverage

Slip Additive

Add slip additive to increase slip resistance

Dulux Avista Slip Reducing Additive Powder



- Disperses readily and evenly through sealer
- Generally increases slip resistance of sealers

Product Codes	
Bare Concrete Primer	FD278072-10L
Sealed Surface Primer	FD278066-10L
Waterbased Tintable Sealer	FD278070-15L
Slip Additive	FD278014-250G











Tintable In Store

Colour Range

Whether you're after a neutral, grey or a traditional look, you'll find a colour in our range for your concrete project.





MERINO



SANDY BEIGE









BLUEGUM

CHARCOAL



FRENCH GREY







DARK TERRACOTTA



NEW BLUESTONE

BRICK RED







JET BLACK



LIGHT MOCHA

Colorbond® Colours

Match your concrete to Colorbond® colours











MONUMENT®

PAPERBARK*

WOODLAND GREY®

SHALE GREY®

SURFMIST*









EVENING HAZE®

WALLABY*

BASALT*

JASPER*

Got questions?

Call our Customer service team on 1800 801 108 or go to www.duluxavista.com.au

Need inspiration?

Check out our image gallery or socials for ideas on colours and finishes







Try our visualiser

Unsure of what products would suit your home? Try our visualiser





Front cover image: Dulux Avista Waterbased Sealer in Shale Grey colour over Bare Concrete Primer.

*When Compared to Solvent Based Sealer.

Colours shown in this brochure are intended as a guide only. Please note due to the limitations of the printing process, photographic and printed images may not represent the true colour. Always confirm your colour choice with Dulux

*Avista is a registered trade mark. Dulux is a registered trade mark of DuluxGroup (Australia) Pty Ltd.

*Colorbond and Colorbond colour names are registered trade marks of Bluescope Steel Limited.

Dulux Avista 1956 Dandenong Rd Clayton VIC 3168 ABN 80 069 961 968

Distributed in New Zealand by: Concrete Plus Limited 150 Hutt Park Rd, Gracefield Telephone: 0800 657 156